


Product information quick connect system 246^{AX}

Metal quick connections and adapters for lines in fuel and fuel cell systems

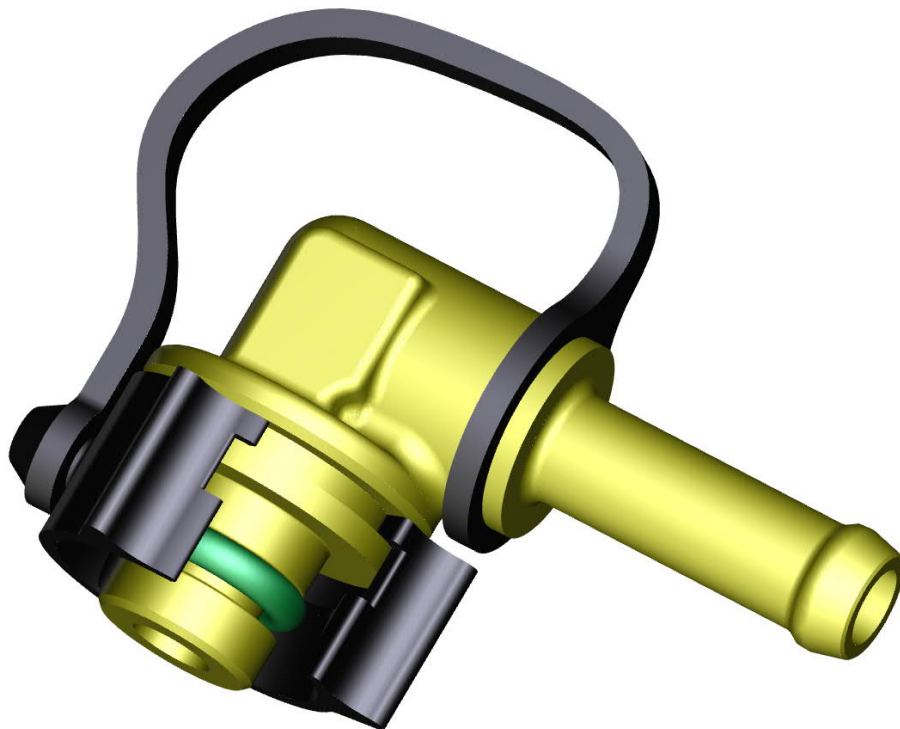

- Quick and safe assembly and disassembly
- System specific connection profile 246 allows for low heights of unit connections and adapters
- Axial clip for tight sealing under connection profile
- Easy to handle
- Poka yoke solutions available upon request

The safest and easiest solution
for fuel and fuel cell systems

VOSS quick connect system 246 ^{AX}

- For the connection of polyamide tubes and hoses
- Straight and elbow plugs made of brass or metal, depending on application or request
- With one O-Ring for coolant, Diesel and Biodiesel
- With two O-Rings for gasoline/ethanol and hydrogen (246 DS)
- Nominal sizes 8 and 12 available
- Operating pressure min. 10 bar, higher pressures upon request
- Temperature range -40 °C to +120 °C, higher temperatures upon request
- Development and production of customer specific line assemblies

